


MAX3421 D+/D- signals are protected against ESD.

5V Supply must be supplied by your application board.

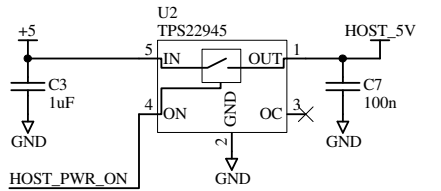

USB 5V Supply: 100mA Current limited switch

If you only have one device attached to the SPI bus then you don't need the decoding circuit below. Just connect SPI_CS2 to the MAX device's SS# input.

